

SOL ZERO RGBW

Proyector exterior para iluminación arquitectónica.

Cuerpo: en aluminio de alta resistencia a la corrosión. Escuadra de sujeción y tornillos de acero inoxidable.

Óptica: lentes de policarbonato transparente.

Distribución de la luz: simétrica (8° / 15° / 30° / 45° / 60°).

Acabado superficial: gris. Otros colores, consultar.

Fuente de luz: LED. RGBW (W: 5000K).

Bajo pedido: RGBW (W: 3000K, 4000K).

Equipo de alimentación: electrónico regulable DMX.

Montaje: en superficie por medio de tornillos.

Áreas de aplicación: iluminación exterior, fachadas exteriores y detalles arquitectónicos.

Outdoor projector for architectural lighting.

Housing: aluminium of high resistance to corrosion. Support and screws made of stainless steel.

Optic: transparent polycarbonate lens.

Light distribution: symmetric (8° / 15° / 30° / 45° / 60°).

Surface finish: grey. Other colours, on request.

Light source: LED. RGBW (W: 5000K).

On request: RGBW (W: 3000K, 4000K).



Control gear: DMX dimmable electronic.

Mounting: surface with screws.

Areas of application: outdoor lighting, exterior facades and architectural details.



W	lm	lm/W	WL / K	Tª Amb	▲	Ø D	H
100	R: 1375	55	615-630nm		8°	270	253
	G: 2125	85	515-530nm	-20°C	15°		
	B: 525	25	465-480nm	+60°C	30°		
	W: 3250	130	5000K		45°		
					60°		
150	R: 2060	55	615-630nm		8°	270	253
	G: 3185	85	515-530nm	-20°C	15°		
	B: 940	25	465-480nm	+60°C	30°		
	W: 4875	130	5000K		45°		
					60°		

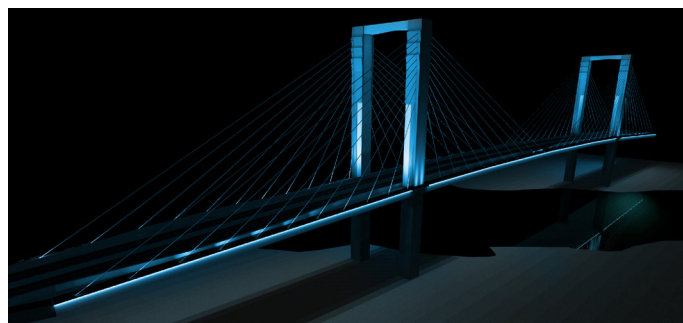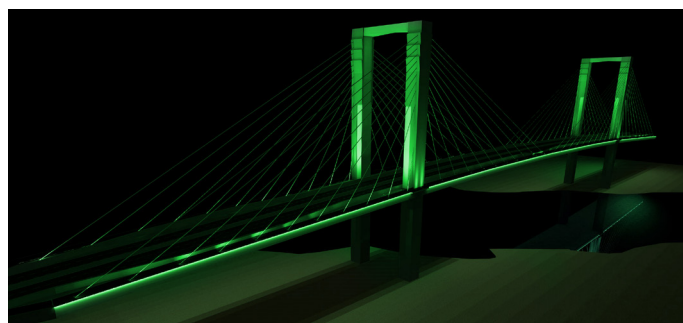

Ejemplo para componer una referencia. Example to compose a reference.

Modelo	K	Potencia	Alimentación	Haz de luz
Model	K	Power	Control gear	Light beam
SOL ZERO	RGBW-5000K	150W	DMX	8°