

S1 WQS

Luminaria para montaje a pared.

Cuerpo: aluminio inyectado.

Reflector: aluminio anodizado brillo

Cubierta: policarbonato opal (O) o transparente (T).

Acabado superficial: color negro.

Fuente de luz: LED.

Índice de reproducción cromática (CRI): CRI>80.

Temperatura de color (K): 3000K, 4000K.

Tolerancia de color (SDCM): 3 elipses de MacAdam.

Equipo de alimentación: On-Off (HF) o regulable DALI (HFRD). Disponible con kit de emergencia.

Bajo pedido: fotocélula integral.

Grado de protección (IP): IP65.

Montaje: instalación directamente a pared mediante tornillos.

Áreas de aplicación: interior y exterior con techo. Pasarelas, porches, terrazas, almacenes y parkings, entre otros.

Luminaire for mounting to wall.

Housing: die-cast aluminium.

Reflector: polished anodised aluminium.

Cover: opal (O) or clear (T) polycarbonate.

Surface finish: black colour.

Light source: LED.

Colour rendering index (CRI): CRI>80.

Colour temperature (K): 3000K, 4000K.

Colour tolerance (SDCM): 3 MacAdam's ellipses.



Control gear: On-Off (HF) or DALI dimmable (HFRD). Available with emergency kit (KE).

On request: integral photocell.

Protection degree (IP): IP65.

Mounting: directly to wall with screws.

Areas of application: indoor and outdoor with roof. Walkways, porches, balconies, warehouses, parkings and others.

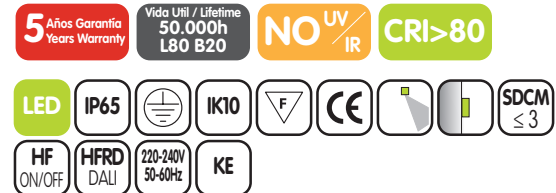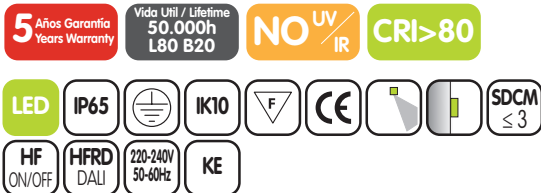

S1 WQS O


W	lm* 3000K	lm* 4000K	lm* 5000K	CRI	Tª Amb	L	A	H	Kg
23	2270	2390	2390	> 80	-25°C +35°C	300	270	190	2,00
50	4940	5200	5200	> 80	-25°C +35°C	300	270	190	2,00

*Flujo luminoso neto a temperatura ambiente ta=25°C. *Output luminous flux at ambient temperature ta=25°C.

S1 WQS T

W	lm* 3000K	lm* 4000K	lm* 5000K	CRI	Tª Amb	L	A	H	Kg
23	2570	2710	2710	> 80	-25°C +35°C	300	270	190	2,00
50	5600	5900	5900	> 80	-25°C +35°C	300	270	190	2,00

*Flujo luminoso neto a temperatura ambiente ta=25°C. *Output luminous flux at ambient temperature ta=25°C.



Ejemplo para componer una referencia. Example to compose a reference.

Modelo	Difusor	Potencia	K	CRI	Alimentación
Model	Diffuser	Power	K	CRI	Control gear
S1 WQS	O	23W	4000K	CRI80	HF

