

L5 LINEAR AD

Luminaria lineal orientable para montaje en carril.

Cuerpo: aluminio.

Reflector: PC.

Acabado superficial: blanco o negro. Otros colores, consultar.

Distribución de la luz: simétrica.

Fuente de luz: LED.

Índice de reproducción cromática (CRI): CRI>90.

Temperatura de color (K): 2700K, 3000K, 4000K.

Tolerancia de color (SDCM): 3 elipses de MacAdam.

Equipo de alimentación: regulable DALI (HFRD).

Grado de protección (IP): IP20.

Montaje: en carril (Stucchi y PowerGear). Otros carriles, consultar.

Áreas de aplicación: tiendas, pasillos, galerías, museos, halls de entrada, hoteles, salas de exposiciones y otros.

Adjustable linear luminaire for rail mounting.

Housing: aluminium.

Reflector: PC.

Surface finish: white or black. Other colours, on request.

Light distribution: symmetric.

Light source: LED.

Colour rendering index (CRI): CRI>90.

Colour temperature (K): 2700K, 3000K, 4000K.



Colour tolerance (SDCM): 3 MacAdam's ellipses.

Control gear: DALI dimmable (HFRD).

Protection degree (IP): IP20.

Mounting: rail (Stucchi and PowerGear). Other rails, consult.

Areas of application: boutiques, corridors, galleries, museums, entrance halls, hotels, showrooms and others.

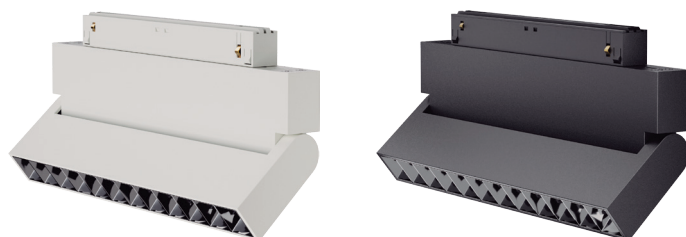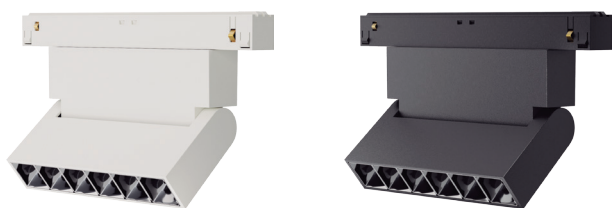

L5 LINEAR AD S



W	lm* 2700K	lm* 3000K	lm* 4000K	CRI	Tª Amb	▲	L
6	540	560	600	> 90	< +40°C	20° 32° 50°	117

*Flujo luminoso neto a temperatura ambiente ta=25°C. *Output luminous flux at ambient temperature ta=25°C.

L5 LINEAR AD M

W	lm* 2700K	lm* 3000K	lm* 4000K	CRI	Tª Amb	▲	L
12	1080	1140	1200	> 90	< +40°C	20° 32° 50°	231

*Flujo luminoso neto a temperatura ambiente ta=25°C. *Output luminous flux at ambient temperature ta=25°C.

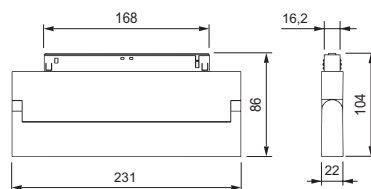

Ejemplo para componer una referencia. Example to compose a reference.

Modelo	Potencia	K	CRI	Alimentación	Color
Model	Power	K	CRI	Control gear	Colour
L5 LINEAR AD S	6W	3000K	CRI90	HFRD	Blanco

La rápida evolución tecnológica del LED modifica de manera continua sus prestaciones.

Los datos aquí facilitados son orientativos.

BIAR Lighting, S.L. se reserva el derecho para realizar ligeras modificaciones técnicas sin previo aviso.

The rapid technological evolution of LED changes continuously its performance.

The data provided here are approximate.

BIAR Lighting, S.L. reserve the right to make slight changes in technical data without previous notice.