

M1 TF LED RGBW

Tira LED flexible para iluminación de interior. Cada chip equipa 4 LEDs, los tres clásicos RGB más un LED adicional blanco neutro o cálido.

Fuente de luz: LED.

Temperatura de color (K): RGB+W (2700K / 4000K).

Equipo de alimentación: 24Vdc (driver no incluido).

Temperatura de funcionamiento: desde -20°C a +40°C.

Grado de protección (IP): IP20, IP65.

Longitud de los cables: 200mm.

Montaje: equipada con cinta adhesiva 3M para una fácil y rápida instalación sobre perfil disipador de aluminio. Ver perfiles M1 TF PS y PE.

Flexible LED strip for indoor lighting. Every chip has 4 LEDs: 3 classical RGB plus an additional neutral or warm white LED.

Light source: LED.

Colour temperature (K): RGB+W (2700K / 4000K).


Control gear: 24Vdc (driver not included).

Working temperature: -20°C to +40°C.

Protection degree (IP): IP20, IP65.

Wire length: 200mm.



Mounting: fast and easy to stick with 3M adhesive back to mount on an aluminium profile. See profiles M1 TF PS and PE.

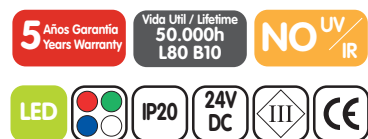

M1 TF LED RGBW IP20

W/m	Vdc	lm/m	K	L	A	H	∅
24	24	1080	RGB + 2700	5000	12	2	71,4
24	24	1175	RGB + 4000	5000	12	2	71,4


Rango de tolerancia para potencia y lm/m: ± 10%. Tolerance range for power y lm/m: ± 10%.

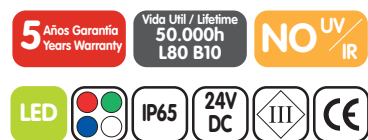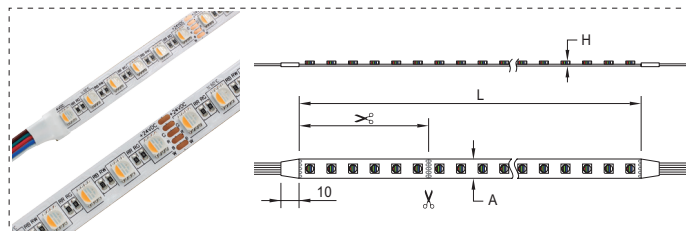

M1 TF LED RGBW IP65

W/m	Vdc	lm/m	K	L	A	H	∅
24	24	985	RGB + 2700	5000	14	4	71,4
24	24	1010	RGB + 4000	5000	14	4	71,4

Rango de tolerancia para potencia y lm/m: ± 10%. Tolerance range for power y lm/m: ± 10%.

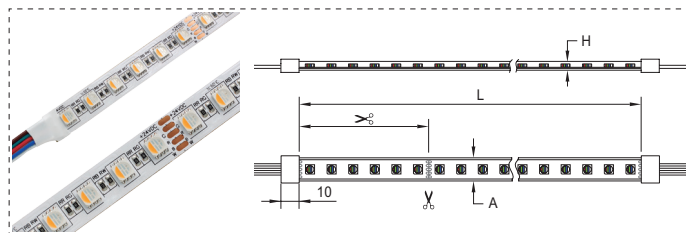

Ejemplo para componer una referencia. Example to compose a reference.

Modelo	Potencia	K	Voltaje
Model	Power	K	Voltage
M1 TF LED RGBW IP20	24W	RGB + 4000K	24V