
# M5 NIKO LENS D60 CRI90

Proyector para montaje en carril con óptica orientable.
**Cuerpo:** aluminio.
**Optica:** lentes de PC.
**Acabado superficial:** blanco o negro. Otros colores, consultar.
**Distribución de la luz:** simétrica.
**Fuente de luz:** LED Xlamp by CREE.
**Indice de reproducción cromática (CRI):** CRI>90.
**Temperatura de color (K):** 2700K, 3000K, 3500K.
**Tolerancia de color (SDCM):** 3 elipses de MacAdam.
**Equipo de alimentación:** On-Off (HF). Driver LC by Tridonic integrado en el adaptador .
**Grado de protección (IP):** IP20.
**Montaje:** en carril (Global, Stucchi y PowerGear). Otros carriles, consultar.
**Areas de aplicación:** tiendas, pasillos, galerías, museos, halls de entrada, hoteles, salas de exposiciones y otros.

Projector for rail mounting with directionable optic.
**Housing:** aluminium.
**Optic:** PC lenses.
**Surface finish:** white or black. Other colours, on request.
**Light distribution:** symmetric.
**Light source:** LED Xlam by CREE.
**Colour rendering index (CRI):** CRI>90.
**Colour temperature (K):** 2700K, 3000K, 3500K.
**Colour tolerance (SDCM):** 3 MacAdam's ellipses.
**Control gear:** On-Off (HF). Driver LC by Tridonicin integrated in the adapter.
**Protection degree (IP):** IP20.
**Mounting:** rail (Global, Stucchi and PowerGear). Other rails, consult.
**Areas of application:** boutiques, corridors, galleries, museums, entrance halls, hotels, showrooms and others.

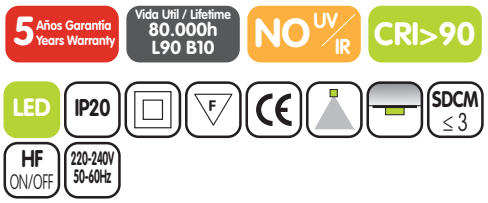



| W | lm* 2700K | lm* 3000K | lm* 3500K | CRI | Tª Amb | ▲ | Ø D | Kg |
|---|---|---|---|---|---|---|---|---|
| **20** | 1920 | 2100 | 2163 | > 90 | -20ºC +50ºC | 15º<br>24º<br>36º | 60 | 0,80 |

*Flujo luminoso neto a temperatura ambiente ta=25ºC. *Output luminous flux at ambient temperature ta=25ºC.








**Bajo pedido** On request



**KHC**
Rejilla de panal antideslumbrante.
Honeycomb louver.

Ejemplo para componer una referencia. Example to compose a reference.

| Modelo | Potencia | K | CRI | Alimentación | Haz de luz | Color |
|---|---|---|---|---|---|---|
| Model | Power | K | CRI | Control gear | Light beam | Colour |
| M5 NIKO LENS D60 CRI90 | 20W | 3000K | CRI90 | HF | 45º | Blanco |

REV. 11/2026

La rápida evolución tecnológica del LED modifica de manera continua sus prestaciones.
Los datos aquí facilitados son orientativos.
BiAR Lighting, S.L. se reserva el derecho para realizar ligeras modificaciones técnicas sin previo aviso.

The rapid technological evolution of LED changes continuously its performance.
The data provided here are approximate.
BiAR Lighting, S.L. reserve the right to make slight changes in technical data without previous notice.